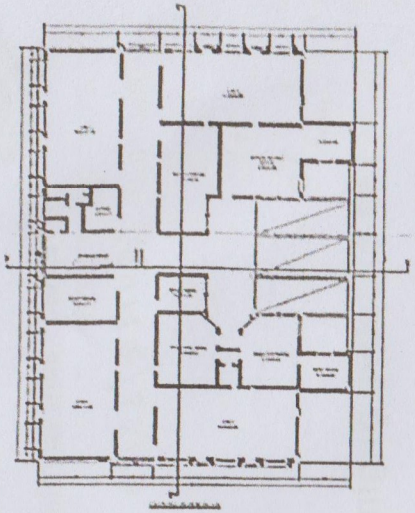

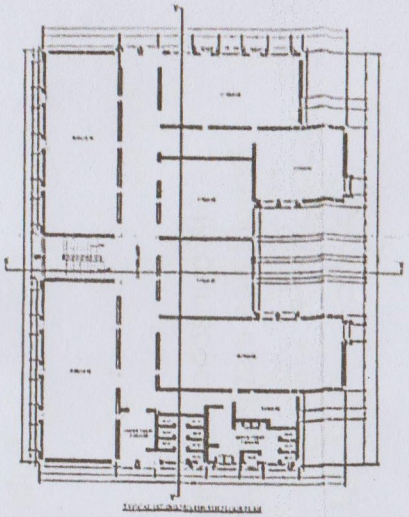

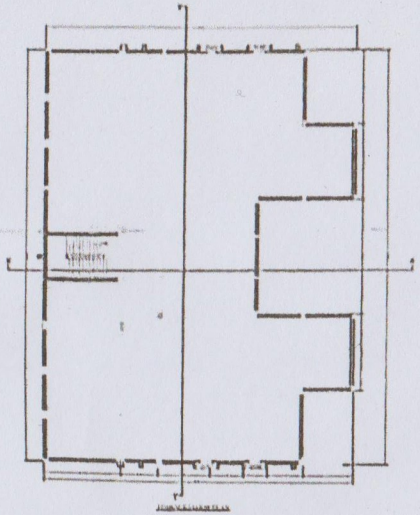

		Date		
SCHEDULE OF OPENINGS				
TYPE	NOS	WIDTH	HEIGHT	DESCRIPTION
DOORS	8	1200	2100	PLYWD DOOR
	24	900	2100	PLYWD DOOR
	36	600	2100	PLYWD DOOR
WINDOWS	7	1800	1200	GLAZED
	21	1200	900	GLAZED
	13	900	1200	GLAZED
	72	1800	2400	GLAZED
VENTILATOR	7	600	600	GLAZED

SPECIFICATION

1. SITE :-
2. COLUMN & FOOTING R.C.C. M20
3. BEAMS, SLAB & LINTEL R.C.C. M20
4. WALLS:- BRICKWORK IN C.M 1:6. EXCEPTION ON OUTSIDE
5. WINDOWS:-FULLY GLAZED ALUMINIUM CASEMENT
6. DOORS:-OPEN TO PLYWD DOORS.
7. PLASTER:-1/2" TH. PLASTER ON WALL 1:6.
8. WALL FINISH :-SET DEPENDING ON NEEDS
9. FLOORING:- CERAMIC / MARBLE FLOORING
10. VISION:-COMPLEXED COPPER VISION.

CALCULATION FOR DIFFERENT REQUIREMENTS OF THE BUILDING

OVER HEAD WATER TANK

TOTAL QUANTITY OF WATER REQUIRED PER DAY
@ 135 LITRE PER PERSON PER DAY = 3375 LITRE
CAPACITY OF OVER HEAD WATER TANK PROVIDED = 5000 LITRE

SEPTIC TANK
ACCORDING TO PROVISIONS GIVEN IN NBC
NO. OF FLAT = 25 PERSONS
ADDING 50 EXTRA = 5 PERSONS
VOLUME OF SEPTIC TANK = 25x 135 LITRE PER HEAD
PROVIDED = 4500 LITRE
TOTAL = 25 PERSONS

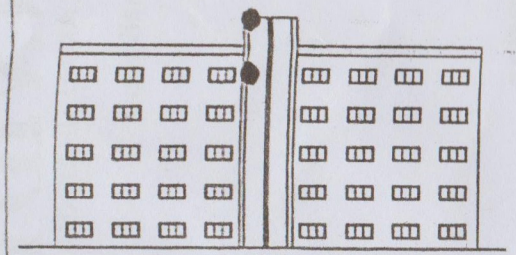

LEFT SIDE ELEVATION

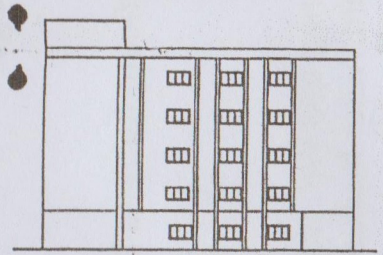

FRONT SIDE ELEVATION

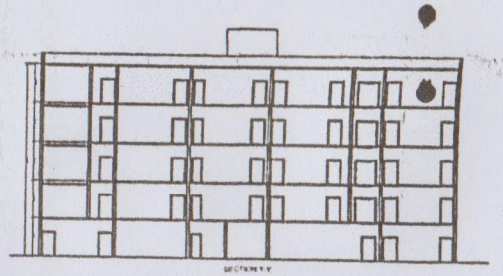

SECTION Y-Y

TOTAL PLOT AREA AS PER DEED - 2307.33 sqm
AREA 57 DECIMAL
OWNER

1. SRI ASHARFEE PANDEY
2. SRI RAM REKHA PANDEY

GROUND FLOOR AREA - 779.36 sqm
1st FLOOR AREA - 779.36 sqm
2nd FLOOR AREA - 779.36 sqm
3rd FLOOR AREA - 779.36 sqm
4th FLOOR AREA - 779.36 sqm
TOTAL BUILTUP AREA = 3896.80 sqmt.
F. A. R. ACHIEVED -3896.80/2307.33=1.69
GROUND COVERAGE- 779.36/2307.33 =33.77%

BUILDING PLAN:-SANATAN VIDYA NIKETAN, GODERMA,UNDER RISHIKUL SHIKSHANIK SANSTHAN R. S PLOT NO. -1172, KHATA NO.- 46, VILLAGE - GODERMA KALA, THANA - REHALA, THANA NO.-0041, DIST. -PALAMU,STATE - JHARKHAND,822124 PLOT AREA-57 DECIMAL,BISRAMPUR NAGAR

SIGNATURE OF OWNER	SIGNATURE OF ARCHITECT
	SUNIL KUMAR SINGH REG. No. ARC/2140/2007 M.No. 9431510818
GOVERNMENT ENGINEER APPROVAL	N APPROVING AUTHORITY
J.E	

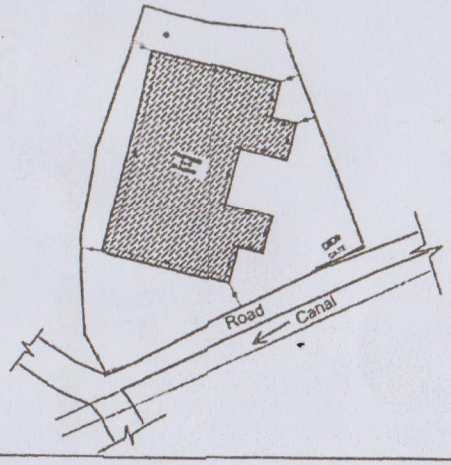

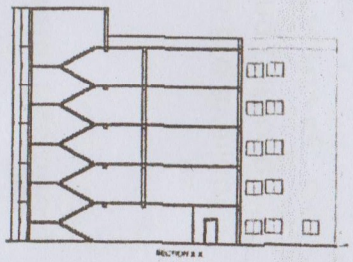

SECTION X-X







72

Principal
Sanatan Vidya Niketan
Godarma

Secretary
Sanatan Vidya Niketan
Godarma